





00F68-3W

CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 316l Stainless steel
LAMP BODY: SUS 316l Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°-40°
POWER CABLE: Chlorine water-resistant cable
H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
SMD3535
LED:
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
RGBW DMX512 built-in program, PWM
Available RGBW Dali built-in program Customized



Model	Power (Watt)	LED Qty(PCS)
00F68-3W	3 W	1x3W=3W

Lumens(LM)		
White=234	Warm white=197	3in1RGB=129

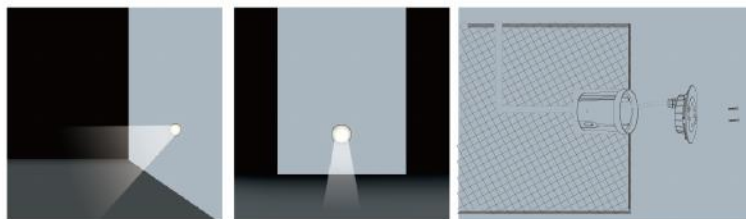

00F118-9W

00F118-9W

CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 316l Stainless steel
LAMP BODY: SUS 316l Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°-40°
POWER CABLE: Chlorine water-resistant cable
H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
SMD3535
LED:
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
RGBW DMX512 built-in program, PWM
Available RGBW Dali built-in program Customized



Model	Power (Watt)	LED Qty(PCS)
00F118-9-WW	9 W	3x3W=9W
00F118-9-M3	9 W	4x3W=12W

Lumens(LM)		
White=930	Warm white=590	3in1RGB=386

