





EPL-LRPN150-6W

CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 304 Stainless steel
LAMP BODY: SUS 304 Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°-40°
POWER CABLE: Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
LED: SMD3535
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)
EPL-LRPN150-6W	6 W	6x1W=6W

Lumens(LM)

White=660 Warm white=750 RGB=330

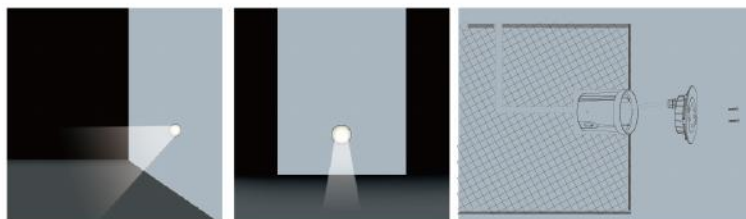

EPL-LRPN170-9W

CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 304 Stainless steel
LAMP BODY: SUS 304 Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°-40°
POWER CABLE: Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
LED: SMD3535
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)
EPL-LRPN170-9W	9 W	9x1W=9W

Lumens(LM)

White=990 Warm white=1125 RGB=495

