





EPL-LRPN180-12W




CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 304 Stainless steel
LAMP BODY: SUS 304 Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°~40°
POWER CABLE: Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
LED: SMD3535
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)
EPL-LRPN180-12W	12 W	12x1W=12W

Lumens(LM)		
White=1320	Warm white=1500	RGB=660

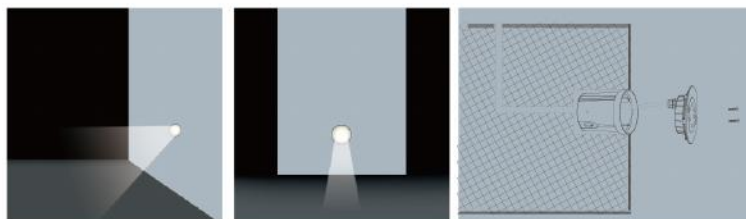

EPL-LRPN190-12W



CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 304 Stainless steel
LAMP BODY: SUS 304 Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°~40°
POWER CABLE: Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
LED: SMD3535
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)
EPL-LRPN190-12W	12 W	12x1W=12W

Lumens(LM)		
White=1300	Warm white=1520	RGB=660

