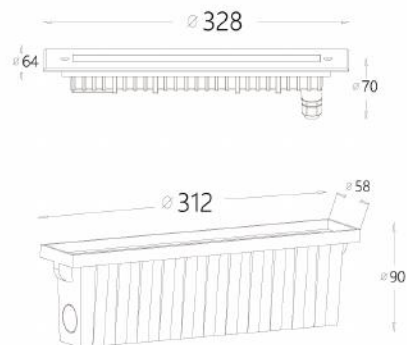



**EPL-RC330-18W**

CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 316l Stainless steel
LAMP BODY: SUS 316l Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°-40°
POWER CABLE: Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
LED: SMD3535
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)
EPL-RC330-18W	18 W	6x3W=18W

Lumens(LM)

White=1255 Warm white=853 3in1RGB=568

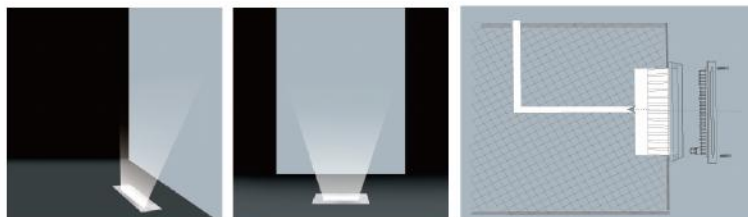**EPL-RC660-36W**

CHARACTERISTIC: Protection class IP 68 10m
SURFACE MATERIAL: SUS 316l Stainless steel
LAMP BODY: SUS 316l Stainless steel
LIGHT WINDOW: Ultra white transparent tempered glass
CABLE GLAND: IP67 copper and nicked coated
GASKET: Molding shaped silicone seal
RECESSED SLEEVE: ABS Black Plastic
LED DRIVER: Constant Voltage input, Constant Current Output
Ta: -20°-40°
POWER CABLE: Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
LED: SMD3535
IP/IK: IP68/IK09
DIMMING SUPPORT: Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)
EPL-RC660-36W	36 W	12x3W=36W

Lumens(LM)

White=2550 Warm white=1750 3in1RGB=1186

