




EPL-F004

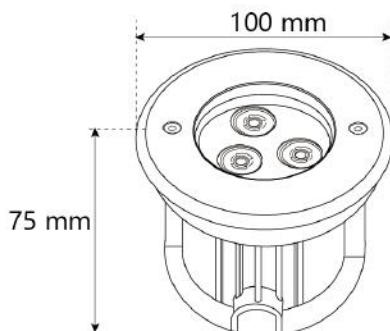


- CHARACTERISTIC:** Protection class IP 68 10m
- SURFACE MATERIAL:** SUS 304 Stainless steel
- LAMP BODY:** SUS 304 Stainless steel
- LIGHT WINDOW:** Ultra white transparent tempered glass
- CABLE GLAND:** IP67 copper and nicked coated
- GASKET:** Molding shaped silicone seal
- RECESSED SLEEVE:** ABS Black Plastic
- LED DRIVER:** Constant Voltage input, Constant Current Output
- Ta:** -20°~40°
- POWER CABLE:** Chlorine water-resistant cable
H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
- LED:** SMD3535
- IP/IK:** IP68/IK09
- DIMMING SUPPORT:** Triac, 1.10V, Dali, RGBW external decoder
RGBW DMX512 built-in program, PWM
Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)	LED-CCT
EPL-F004-W	3 W	3x1W=3W	White
EPL-F004-WW	3 W	3x1W=3W	Warm White
EPL-F004-BL	3 W	3x1W=3W	Blue
EPL-F004-MR	3 W	3x1W=3W	RGB

Lumens(LM)

White=2640 Warm white=2950 RGB=1130

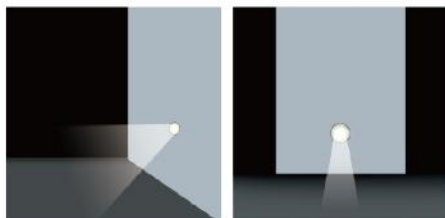

Triac
Dali
0-10V
DMX512

IP68 IK09