




EPL-F005

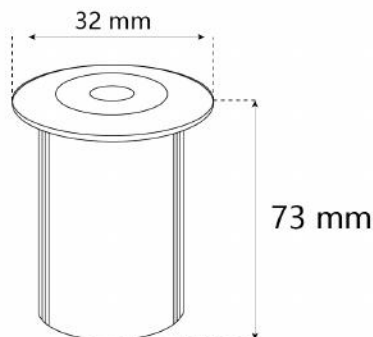


- CHARACTERISTIC:** Protection class IP 68 10m
- SURFACE MATERIAL:** SUS 304 Stainless steel
- LAMP BODY:** SUS 304 Stainless steel
- LIGHT WINDOW:** Ultra white transparent tempered glass
- CABLE GLAND:** IP67 copper and nicked coated
- GASKET:** Molding shaped silicone seal
- RECESSED SLEEVE:** ABS Black Plastic
- LED DRIVER:** Constant Voltage input, Constant Current Output
- Ta:** -20°-40°
- POWER CABLE:** Chlorine water-resistant cable
 H07RN-F2x1mm², L=1m, 3m, 5m (12V/24V)
 H05RN-F2x1.0+3*0.3mm², L=3m (12V/24V-DMX512)
 H05RN-F4x0.75mm², L=1m, 3m, 5m (12V/24V-Dali)
- LED:** SMD3535
- IP/IK:** IP68/IK09
- DIMMING SUPPORT:** Triac, 1.10V, Dali, RGBW external decoder
 RGBW DMX512 built-in program, PWM
 Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)	LED-CCT
EPL-F005-W	1 W	1x1W=1W	White
EPL-F005-WW	1 W	1x1W=1W	Warm White
EPL-F005-BL	1 W	1x1W=1W	Blue

Lumens(LM)

White=2640 Warm white=2950 RGB=1130

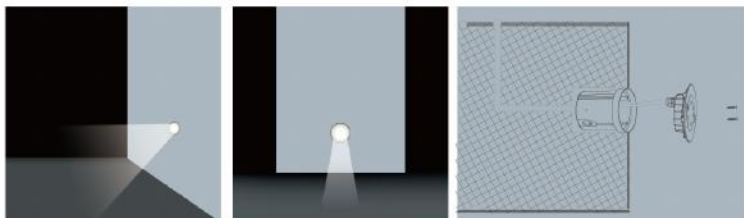

Triac
Dali
0-10V
DMX512

IP68 IK09