


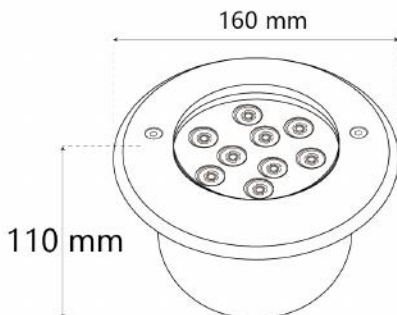

EPL-F009

CHARACTERISTIC:	Protection class IP 68 10m
SURFACE MATERIAL:	SUS 304 Stainless steel
LAMP BODY:	SUS 304 Stainless steel
LIGHT WINDOW:	Ultra white transparent tempered glass
CABLE GLAND:	IP67 copper and nicked coated
GASKET:	Molding shaped silicone seal
RECESSED SLEEVE:	ABS Black Plastic
LED DRIVER:	Constant Voltage input, Constant Current Output
Ta:	-20°-40°
POWER CABLE:	Chlorine water-resistant cable H07RN-F2x1mm ² , L=1m, 3m, 5m (12V/24V) H05RN-F2x1.0+3*0.3mm ² , L=3m (12V/24V-DMX512) H05RN-F4x0.75mm ² , L=1m, 3m, 5m (12V/24V-Dali)
LED:	SMD3535
IP/IK:	IP68/IK09
DIMMING SUPPORT:	Triac, 1.10V, Dali, RGBW external decoder RGBW DMX512 built-in program, PWM Available RGBW Dali built-in program Customized

Model	Power (Watt)	LED Qty(PCS)	LED-CCT
EPL-F009-W	9 W	9x1W=9W	White
EPL-F009-WW	9 W	9x1W=9W	Warm White
EPL-F009-BL	9 W	9x1W=9W	Blue
EPL-F009-MR	9 W	9x1W=9W	RGB

Lumens(LM)

White=2640 Warm white=2950 RGB=1130

