


Side-Mount Sand Filter With Multiport Valve



Accessories

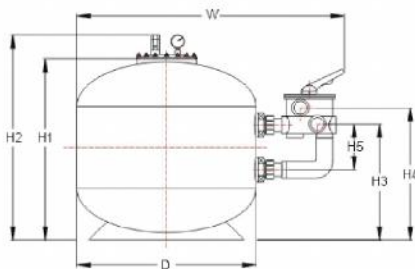

Feature

Tank : voluble molding of fiber glass reinforced plastics corrosion resistant, good abrasion resistance, deformation-proof. Uniquely designed distribution make a stable and even water flow to improve drainage system. Easy to install, maintain free Outlet turbidity. <2FTU.



Working pre(kPa): 350

Model No	Code	Diameter D (mm)	Inlet/Outlet (inch)	Flow(m ³ /h)	Filtration area(m ²)	H1(mm)	H2(mm)	H3(mm)	H4(mm)	H5(mm)	W(mm)	Package(mm)	NW(kg)	GW(kg)
EPL-SS525	PLS-30	525	1.5	8	0.19	610	720	410	475	150	885	550*550*550	15.3	18.3
EPL-SS600	PLS-22	600	1.5	10	0.22	620	730	430	495	150	960	620*620*680	17.2	22.5
EPL-SS650	PLS-33	650	1.5	12	0.32	695	805	450	515	150	1010	680*680*740	20.0	24.0
EPL-SS700	PLS-23	700	1.5	14	0.35	715	825	470	535	150	1060	720*720*750	23.0	27.8
EPL-SS750	PLS-35	750	2.0	17	0.40	765	875	540	615	200	1140	780*780*830	26.1	32.0
EPL-SS800	PLS-24	800	2.0	19	0.50	815	925	550	625	200	1190	820*820*860	30.0	36.2
EPL-SS900	PLS-25	900	2.0	21	0.64	900	1010	620	695	200	1250	920*920*1050	36.0	41.5
EPL-SS1050	PLS-27	1050	2.0	24	0.83	1065	1175	700	775	200	1440	1060*1060*1040	57.0	65.3
EPL-SS1200	PLS-29	1200	2.0	30	1.13	1200	1310	780	855	200	1590	1220*1220*1270	69.5	77.0

Note: Height of outfall = Height of outlet