

Side-Mount Sand Filter With Multiport Valve



Feature


Tank : voluble molding of fiber glass reinforced plastics corrosion resistant, good abrasion resistance and deformation-proof. Uniquely designed distribution make it stable and even water flow to improve drainage system. Easy to install, maintain free Outlet turbidity. <2FTU.

Transparent Cover

you can see the contamination inside the sand tank at any time.



Accessories

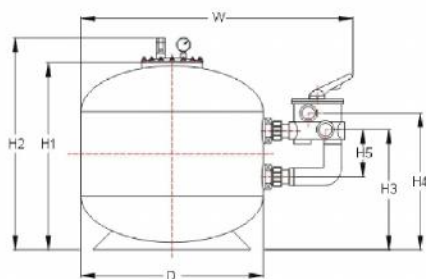

工作压力 Working pre(kPa): 350

Model No	Code	Diameter D (mm)	Inlet/Outlet (inch)	Flow(m ³ /h)	Filtration area(m ²)	H1(mm)	H2(mm)	H3(mm)	H4(mm)	H5(mm)	W(mm)	Package(mm)	NW(kg)	GW(kg)
EPLSS500	PLS-30	525	1.5	12	0.19	610	720	410	475	150	885	550*550*650	14.1	18.1
EPLSS600	PLS-22	600	1.5	14	0.22	620	730	430	495	150	960	620*620*680	16.9	21.4
EPLSS650	PLS-33	650	1.5	17	0.32	695	805	450	515	150	1010	680*680*740	20.0	25.5
EPLSS700	PLS-23	700	1.5	19	0.35	715	825	470	535	150	1060	720*720*750	22.3	27.8
EPLSS750	PLS-35	750	2.0	21	0.40	765	875	540	615	200	1140	780*780*830	25.7	32.7
EPLSS800	PLS-24	800	2.0	24	0.50	815	925	550	625	200	1190	820*820*860	38.8	36.2
EPLSS900	PLS-25	900	2.0	30	0.64	900	1010	620	695	200	1290	920*920*1050	35.4	44.9
EPLSS1050	PLS-27	1050	2.0	38	0.83	1065	1175	700	775	200	1440	1060*1060*1040	53.3	58.8
EPLSS1200	PLS-29	1200	2.0	42	1.13	1200	1310	780	855	200	1590	1220*1220*1270	59.8	65.4